

Declaration of Performance

Product: Strato Membrane

Type, Batch or Serial Number: see product


Intended use or uses: Anti-fracture uncoupling membrane to be used under tiles

Material: HDPE with roughened surface, studded core combined with spunbonded polypropylene textile

Characteristics	Test	Measurement	Result
Waterproofness		HDPE	Waterproof
Tensile test*	EN 1348	N/mm ² or Mpa	0.45
Weight	EN 1849/2	g / sq mt	625
Product thickness	EN1849/2	mm	3.3
Robinson wheel test**	ASTM C627	Rating	Extra Heavy
Temperature resistance		°C	-30 / +70
MD/CMD Breaking Strength	EN ISO 10319	kN/m	<8/8
Fire resistance		Euro Class	F
Intended working life		Years	25
Crack Bridging Ability		mm	1.5
Dangerous Substances			None

*Pull out with cement glue C2. **On wood Substrate

Signed on behalf of
the manufacturer

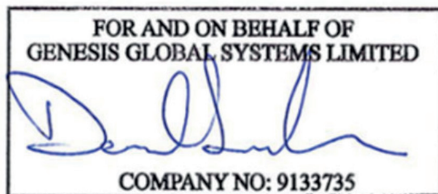

David Saunders
04.02.2022

Manufacturing
Certification

