


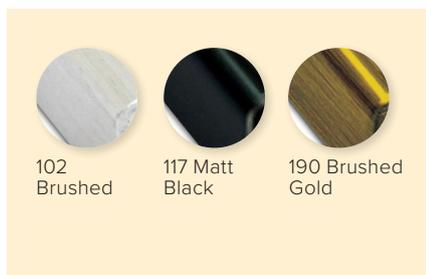
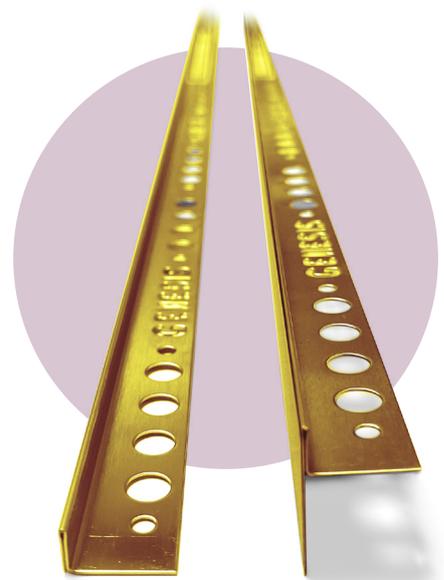


KBSL / R

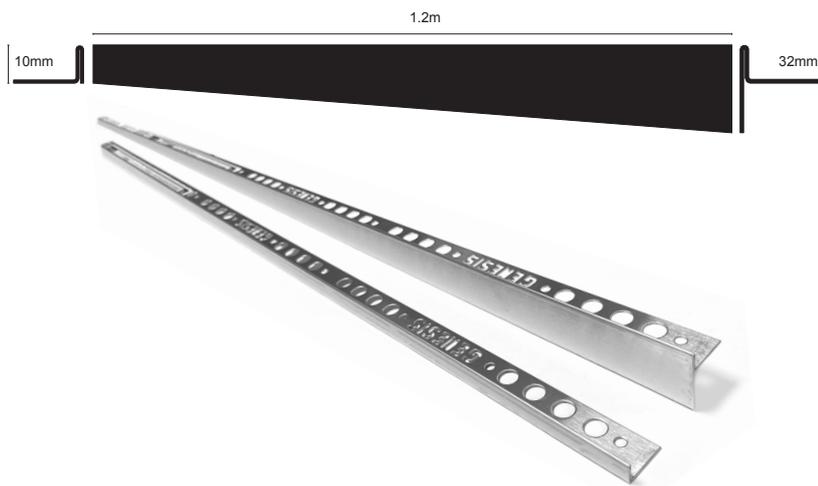

Product Description

A Grade 304 stainless steel line profile which allows you to accurately configure tiled showers flush with the floor. Developed in order to cover the slope of 2% it makes the shower area aesthetically perfect and at one with the modern trends of interior design.

Genesis Stainless Steel profiles are supplied with a clear transparent film for added protection, before, during and after application - as standard.

Dimensions

Available in 1.2m lengths, depth is 10mm and 32mm

Maintenance

Advanced Cleaning for Stainless Steel Discoloration.

Tarnish or Water Stains:

The first stage of corrosion is completely on the surface and is easily removed by most commercial metal polishes. Discoloration will be greater at indoor facilities due to the chlorine vapor trapped in an inside environment.

Light Rusting:

Rust is visible at this stage but little or no pitting has yet occurred. A stronger cleaning agent, such as Simichrome Polish, is required.

Heavy Rusting:

A deep coat of rust with surface pitting can develop if corrosion has been left unchecked for a long time. For advanced corrosion naval jelly is recommended.

Surface Restoration:

To remove or reduce pitting damage caused by corrosion has been left unchecked for a long time. Scotchbrite works well for this purpose. Work only in the direction of the existing grain and never use steel wool.

Installation

1. Check that the thickness of the covering to be laid corresponds with the height of the selected profile.
2. Verify the necessary length and cut the profile to the required measurement, using the proper tools.
3. With a toothed-spatula, spread the adhesive on the laying surface.
4. Press the profile so that the previously applied adhesive comes out from the perforations of the tabs.
5. Delicately place and press the floor covering, ensuring that it is in line with the profile and at the proper distance required for the gap (usually 1 or 2 mm).
6. With the proper gap material, seal the cleft left between the wall covering and the profile. Clean excess gap material, glue, detergent, etc. carefully with a soft sponge with water within 10 minutes of application.

Technical Details

Stainless Steel is a corrosion resistant chromium/ nickel alloy steel that is strong and durable with excellent lustre. However, it is not rustproof, particularly in the harsh environment of a swimming pool. Chlorine and bromine used for sanitization are highly caustic chemicals for stainless steel and heat and humidity enhance the corrosiveness of these chemicals. Regular cleaning is the best way to prevent corrosion and add to the service life for your profiles and any other stainless steel equipment. The goal of your cleaning and maintenance program should be to keep the stainless steels protective Chromium oxide layer intact. This is what prevents corrosion. Varying Stages of contamination.

Stainless Steel AISI 304 / DIN1.4301 Surface BA1	
C%	0.2-0.6
Mn%	2.0
Si%	0.1
P%	0.75
S%	0.045
Cr%	0.03
Ni%	18-20
N%	10.5

Stainless Steel AISI 430 / DIN 1.4016 Surface BA1	
C%	0.0-0.08
Mn %	0.0-1.00
Si %	0.0-1.00
P %	0.0-0.04
S%	0.0-0.02
Cr %	16-18.00
Fe%	Balance

Stainless Steel application in a swimming pool, leisure pool and more especially hydrotherapy type pools where temperatures and humidity's are likely to be even higher than modern larger "municipal" Leisure pool buildings.

Types 201,304,316 and 321 are widely used and have given excellent service when properly maintained; type 316 is preferred for its greater resistance to staining, pitting and crevice corrosion for the following applications:

- Fully immersed or drenched every session, e.g. pool ladders, pool side rails, some diving board structures;
- Only Splashed with pool water but neither safety-critical nor load-bearing – e.g. changing room fittings, lockers etc;
- In the pool hall atmosphere but neither safety-critical nor load-bearing – e.g. Wall decorative paneling;
- Remote from the influence of the pool hall atmosphere – e.g. café and entrance lobby fittings;

Components which are in the pool hall atmosphere, which are safety-critical and load bearing but which are not washed or cleaned frequently, are potentially vulnerable to stress corrosion cracking (SCC).

Types 201,304,316 and 321 have found to be susceptible to SCC in laboratory tests and in some swimming pool atmospheres and must not be used for components vulnerable to SCC if failure could result in personal injury

General Cleaning and Maintenance

General Cleaning and Maintenance Suggestion for Stainless Steel

DO NOT:

Do not use steel wool or sandpaper, or mineral acids, bleaches or chlorine cleansers.

Do not add chlorine to your pool right next to your stainless steel. Add it as far away as possible.

Do not store stainless steel in a closed area underneath steel beams to avoid corrosive condensation from dripping onto to the equipment and leaving brown spots.

Do not store stainless steel where it will attract and retain moisture or airborne contaminants and do not store equipment in the same areas as chlorine.

DO:

Rinse off stainless steel when exposed to Chlorine frequently with fresh water to wash away accumulated chemicals such as chlorine and wipe dry with a clean cloth. Especially try to clean immediately after use around chlorides (chlorine powder, seawater, etc.)

Clean frequently with a cleaner and water. Any cleaner that is safe for glass is usually safe for stainless steel.

Inspect frequently, if you notice discoloration, tarnish or water stains, increase the frequency of your fresh water rinses to reduce accumulated chemicals.

Remove any rust spots as soon as possible to prevent irreversible pitting.

Occasionally clean with borax, soda ash, or a non-abrasive commercial cleanser and water.

Stubborn Stains may be removed with a magnesium oxide, ammonia and water paste.

Consider the following periodic cleaning program:

- 1 can of powered cleanser
- 1 Scotchbrite pad
- 1 spray bottle cleaner
- 1 paste automotive wax

Directions:

Wet cleaning pad with fresh water (do not use pool water) and apply powered cleanser. Using gentle pressure, rub stained areas in the same direction of the existing polishing grain until stains are removed. Rinse with clean water. Use cleaner de-greaser to remove any stains. Thoroughly dry the stainless then apply wax. Let wax dry to a haze and buff to a shine with a clean dry cloth. Automotive waxes will provide added beauty and protection for your equipment.

