



# ETR



## Plain

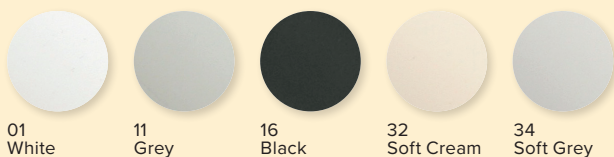

## Marble Effect



### Product Description

A round edge PVC edging trim - this profile features a small quadrant face which is good for 3 dimensional alignment, overhang lips to better butt against the cushion edge of the ceramic tile and a second upright support to close the face and make it suitable for floor tile use.

### Maintenance

Genesis ETR requires no special maintenance.  
Clean periodically using a neutral detergent to maintain the appearance.  
Regular cleaning aids the longevity of the profile and ensures there is no corrosion that could affect safety.

### Dimensions

All profiles are available in 2.5m lengths. In depths of 6, 7, 8, 10 and 12mm.

### Technical Details

UPVC is particularly suitable for a wide range of application due to its excellent chemical resistance, however note the following:

Not recommended for use above 60°C resistant to most oils, alcohols, petrol and fats. It is unsuitable for use in contact with aromatic and chlorinated hydrocarbons, ketones, nitro compounds, esters and cyclic ethers with cause some swelling.

### Installation

1. Select ETR according to tile thickness.
2. Trowel tile adhesive over the area that forms the perimeter of the tiled covering.
3. Press the perforated anchoring leg of the ETR into the tile adhesive and align, mechanical fix if required.
4. Trowel additional adhesive over the perforated anchoring leg to ensure full coverage.
5. Solidly embed the tiles so that the tiled surface is flush with the top of the profile, the profile should not be higher than the tiled surface, but rather up to approximately 1 mm lower.
6. Fill the joint completely with grout.

Property	Test Method	Result
Vicat Softening Point	ISO 306 PN-EN ISO 306: 2014-02	79.8±20°C
Shore hardness	PN-EN ISO 868: 2005	70±5 ShD
Charpy impact strength	PN-EN ISO 179-1/eC:2010	1.7 C* kJ/m <sup>2</sup> <small>*the test is made from the raw material, not from the final product</small>
Maximum stress, durability	PN-EN ISO 527-1:2012, PN-EN ISO 527-2:2012	35.4 MPa
Colour variation	L*a*b	Conform with defined colour referential (ΔE≤4)

### Allied Products:

ETR has specially designed PVC three way corner pieces, designed to provide a perfect rounded safe edge so no mitring is required. Available in 6, 8, 10 and 12mm depths to suit all profiles.

