


Metal Shelves

KBSHD HD Corner

- Classic design

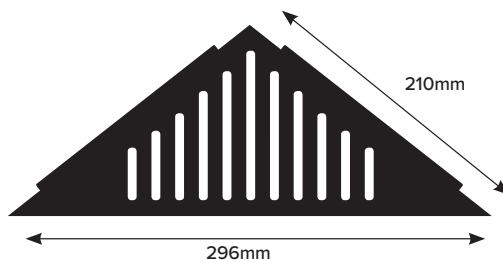

Stainless Steel



Retro-Fit




4mm



KBSSA Triangle XL

- Classic design

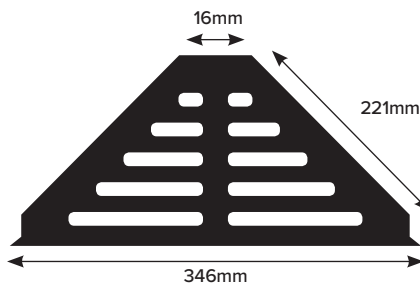

Aluminium



Retro-Fit




1.5mm



KBSTS Straight

- Alternative design to corner shelf

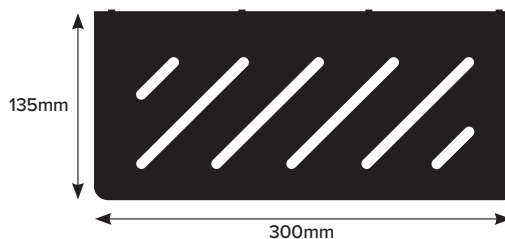

Stainless Steel



Tile-In




1.4mm



KBREV Reversible Corner

- Unique reversible option
- Allows tile finish
- Integral bead to suit 10/12mm tile edge

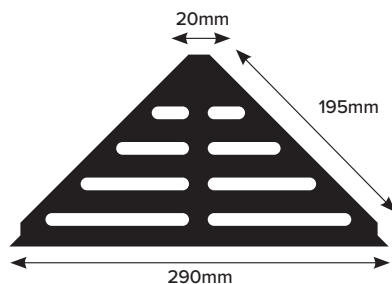

Stainless Steel



Tile-In



Reversible




1.4mm



Metal Shelves

KBSSS Triangle

- Classic design

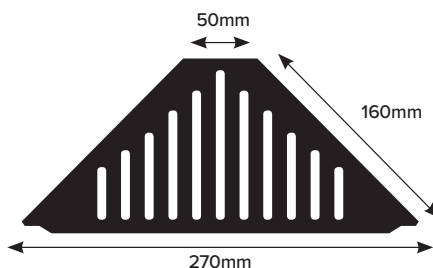

Stainless Steel



Retro-Fit




1.4mm



KBSWS Wing

- Tapered corner design

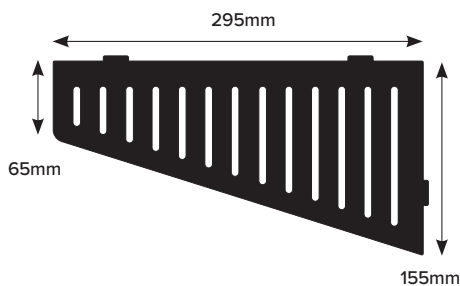

Stainless Steel



Retro-Fit




1.4mm



KBSDS Diamond

- Symmetrical corner installation
- Striking design

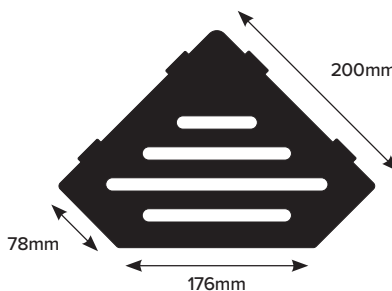

Stainless Steel



Retro-Fit




1.4mm



KBRVR Retro Reversible

- Unique reversible option
- Allows tile finish
- Integral bead to suit 10/12mm tile edge

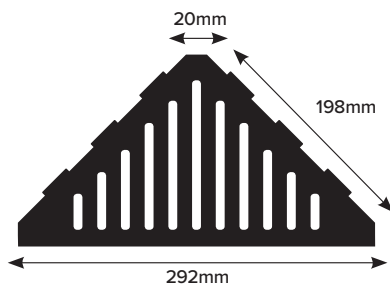

Stainless Steel



Tile-In



Reversible



1.5mm



Technical Details

Profiles are available in different anodised finishes and powder coated finishes - All natural Aluminium (Mill Finish) has a oxide film of approx. 0.2 microns, when Mechanically and Chemically polished the anodising process increases this to 5 microns, up-to 20 for the Matt finish and 100 for powder coated.

Aluminium AA 6063 T6 / UNS A96063 anodised to DIN 17611	
Si%	0.2-0.6
Fe%	0.35
Cu%	0.1
Mn%	0.1
Mg%	0.45-0.9
Zn%	0.1
Cr%	< 0.01
Al	Balance

Stainless Steel is a corrosion resistant chromium/ nickel alloy steel that is strong and durable with excellent lustre. However, it is not rustproof, particularly in the harsh environment of a swimming pool. Chlorine and bromine used for sanitization are highly caustic chemicals for stainless steel and heat and humidity enhance the corrosiveness of these chemicals. Regular cleaning and wiping dry after use is the best way to prevent corrosion and add to the service life for your profiles and any other stainless steel equipment. The goal of your cleaning and maintenance program should be to keep the stainless steels protective Chromium oxide layer intact. This is what prevents corrosion. Varying Stages of contamination.

Stainless Steel AISI 304 / DIN1.4301 Surface BA1	
C%	0.2-0.6
Mn%	2.0
Si%	0.1
P%	0.75
S%	0.045
Cr%	0.03
Ni%	18-20
N%	10.5


Installation

KBREV - With Tile

1. Place shelf behind the tiles with the front edge facing upwards.



2. Set tile into the shelf.

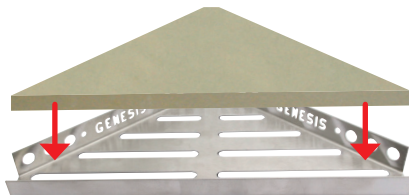

3. Seal with silicone.



KBREV - Without Tile

1. Place the shelf behind the tiles with the front edge facing downwards.



2. Attach the rest of the tiles on top.



3. Seal with silicone.

KBSHD, KBSSA, KBSSS, KBSWS, KBSDS, & KBRVR

1. Tile in during installation or retrofit by fixing with silicone into the grout joint.



KBSTS

1. Place the shelf behind the tiles with the front edge facing downwards.
2. Attach the rest of the tiles on top.
3. Seal with silicone.



Available Finishes

Bright Silver	Brushed	Matt Black	Gold	Brushed Gold				
Chalk Stone	Granite	Bath Stone	York Stone	Sand Stone	Dark Granite	Earth Stone	Urban Stone	Bronzite

*Aluminium Only