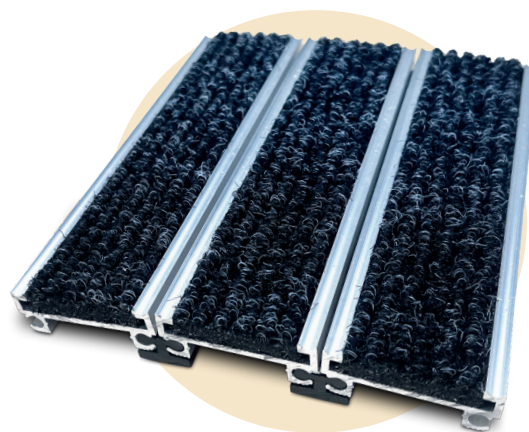
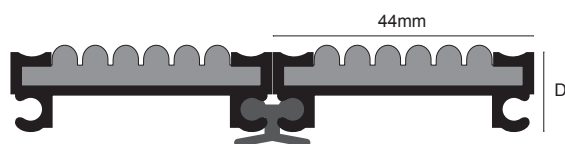


Product Description

TrakMat® TOKYO is a heavy duty primary entrance mat with exceptional performance. The closed construction ensures that all debris is captured by the mat surface for a convenient cleaning operation. Suitable for both foot and trolley traffic, the design features deep profile aluminium scraper treads for maximum effect.

The matting is assembled by means of a PVC hinge which features an integral damper strip. There is a wide variety of wiper strip options to suit almost any application.

Technical Details

Aluminium AA 6063 T6 / UNS A96063 anodised to DIN 17611

Si%	0.2-0.6
Fe%	0.35
Cu%	0.1
Mn%	0.1
Mg%	0.45-0.9
Zn%	0.1
Ti%	0.1
Cr%	0.1
Al	Balance

Dimensions

Available in 17 and 22mm depth.

Maintenance

Regular Maintenance

Regular maintenance is required so the TrakMat® remains effective. Normal daily soiling can be dealt with using a suction vacuum cleaner. A 2000 Watt model will give better results than a lower powered model. The use of rubber bladed wet floor tool attachment should increase the effectiveness of the cleaning.

Vacuum the mat to remove dust and dirt from its surface. Vacuum also along the profiles to clean interstices.

Periodic maintenance

Best results can be achieved by the periodic use of a spray extraction carpet cleaning machine.

The use of a mild detergent (neutral pH) cleaning solution in the carpet cleaning machine should loosen ingrained soiling and aid the removal of oils and grease. More stubborn stains should be treated a solvent based spot remover prior to re-cleaning with the detergent solution.

Chewing Gum can be removed by freeze spraying or with a proprietary chewing gum remover and then scraped or combed out of the matting carpet pile. This should be done before the full cleaning process is started.




Entrance Matting Systems typically require a recess in which to lie. This recess must be of sound condition, level and flat.

Generally aluminium matting should be installed with a small tolerance to the surround, to allow for expansion with temperature variation.


Exact installation detail varies between products, and should be confirmed at time of order.

If the dimension of the length of the profiles is longer than 2500m, the mats will need to be manufactured in several pieces to accommodate the positioning of the doors as follows:

✓ Correct

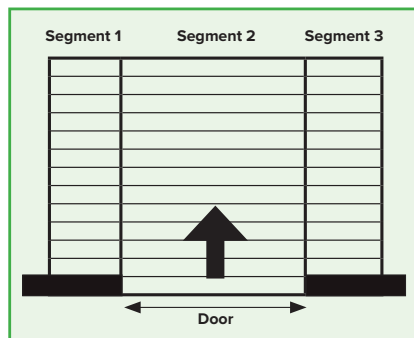


✓ Correct

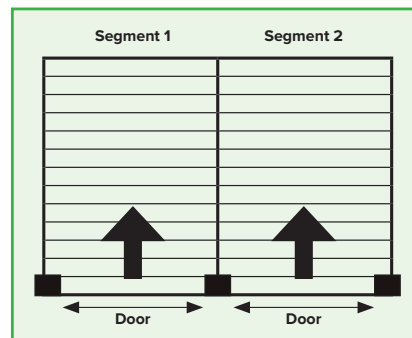


Never manufactured in the following conditions:


✗ Incorrect

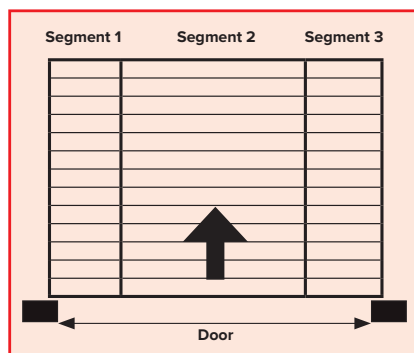


✗ Incorrect

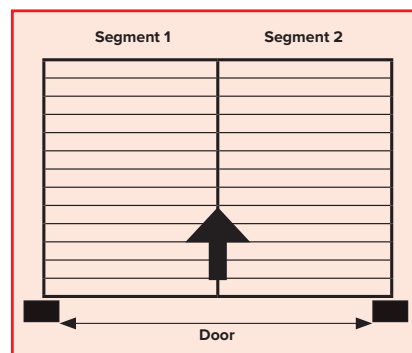

Frame Options (Please contact Genesis for full range)




RSA




RUA



RAA




TDP




ESA



RAR077



RAR107



RAR157



RAW057